

• Max. head - 35 m and max. flow - 1000 lpm

NEW PRODUCT

TORRENTMASTER

TM1000 3" TRANSFER PUMP

Horizontal, single-stage, surface mounted centrifugal pump with cast iron open style impeller for pumping debris free water coupled to a Honda GX200 engine.





ENGINE DATA

Engine	Model	Nominal HP	Displacement CC		Canaait Fuel		Fuel Consumption @ 3600 RPM	Recommended Oil Type	Oil Capacity
Honda	GX200	6.5	196	3000 RPM	3.1 litres	Unleaded	1.7 litres/hour	10W/30 API SG	0.6 litres

DIMENSIONS

Model	Weight Approx.	Inlet	Outlets	Carton L x W x H	Packed Weight
TM1000	27.7 kg	3" BSP (male)	3" BSP (male)	530 x 420 x 530 mm	28 kg



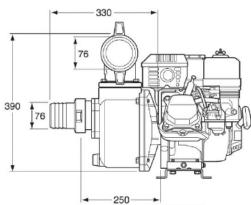


PUMP CONSTRUCTION MATERIALS

Component	Material
Pump casing	Powder coated aluminium
Impeller	Cast iron
Diffuser	Cast iron
Nuts & tails	Aluminium
Seal flexible bellows	Nitrile
Seal stationary face	Ceramic
Seal rotating face	Carbon
Seal spring	Stainless steel
Motor shaft	Mild steel
O'Rings	Nitrile

PERFORMANCE

Model	P/No	Performance										
T141000	07141000	Head (m)	3	7	10	14	17	21	24	28	31	34
TM1000	OTM1000	Flow(L/min)	980.4	952.4	884.6	808.6	722.6	614	514.1	375.9	212.4	32.9

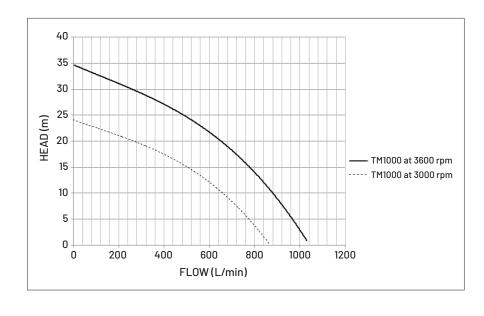

OPERATING CONDITIONS

Fluid:	Water
Max. Water temperature:	40°C
Min. Water temperature:	1°C
Max. Ambient temperature:	40°C*

Suitable for pumping clean non-aggressive liquids without solids or fibres in suspension.

*Engine performance greatly reduced with increased ambient temperature and/or altitude, clarify with Engine Manufacturer.



1-21 Monash Drive | Dandenong South, VIC 3175 | Australia | 1300 137 344 | onga.com.au

Unless otherwise indicated, copyright in the content of this document is the property of Pentair Water Australia under Australian copyright law. Unless otherwise indicated, content may not be reproduced or transmitted without our prior written permission.