


MULTISTREAM

SINGLE-CHANNEL SEWAGE PUMP

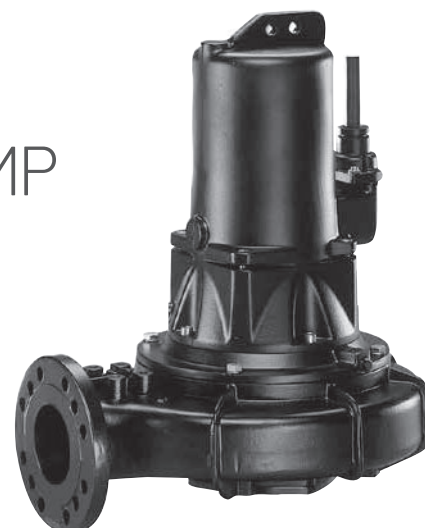

- Adjustable single-channel impeller
- Connection alternatively PN6 or PN10
- Safe to run dry
- Controllable oil chamber
- Plug-type cable connection (MultiStream 10...-100...)
- SiC mechanical seal
- Moisture-sealed cable inlet
- Installed motor protection

DESCRIPTION

The centrifugal MultiStream submersible sewage pumps are suitable for handling effluent or sewage in municipal and industrial pumping stations as well as in surface water drainage applications. The smaller types are also used very successfully as portable units to deal with emergency situations. The submersible pumps are made with 10 m cable and free lead ends. The through shaft is fully encapsulated against the pumped media and with its short shaft end a long-life span is ensured. The adjustable axial gap of the MultiStream pump makes it possible to re-optimize the efficiency in case of abrasion by adjusting only one single screw. This can be done very cost-effectively when maintenance is carried out and the pump keeps its optimum performance on a long-term basis.

MultiStream pumps are recommended for effluent that contains fibrous matter / effluent that contains solids / mixed water / raw effluent / rainwater.

Key benefits include:

- **Energy-efficient pumping**
The high efficiency of the pumps makes this possible.
- **Long service life**
Optional wear coating on the impeller – also ideal when pumping abrasive wastewater.
- **Maximum operational reliability**
Hydraulics optimised to prevent entwining.
- **Low maintenance costs**
The adjustable axial gap allows the efficiency of the pump to be maintained even if there are signs of wear.
- **Low life cycle costs**
Thanks to easily exchangeable components, such as the wear plate and the adjustable axial gap.
- **Range of accessories**
Enables optimum use of the pumps in each application.

MECHANICAL DATA

Pump	Vertical single-stage
Bearing	Ball bearings, grease-lubricated
Seal on motor side	Duplex shaft seal, from 55/: mechanical seal
Oil chamber	Yes
Seal on medium side	SiC mechanical seal

Run dry protection	Yes
Impeller	Channel impeller, grey cast iron from 55/2... spheroidal graphite iron
Motor housing	Grey cast iron
Pump housing	Grey cast iron
Submersible	Yes

ELECTRICAL DATA


Power line	10m H07RN-F
------------	-------------

Type of enclosure	IP 68
-------------------	-------

MULTISTREAM

SINGLE-CHANNEL SEWAGE PUMP

PERFORMANCE

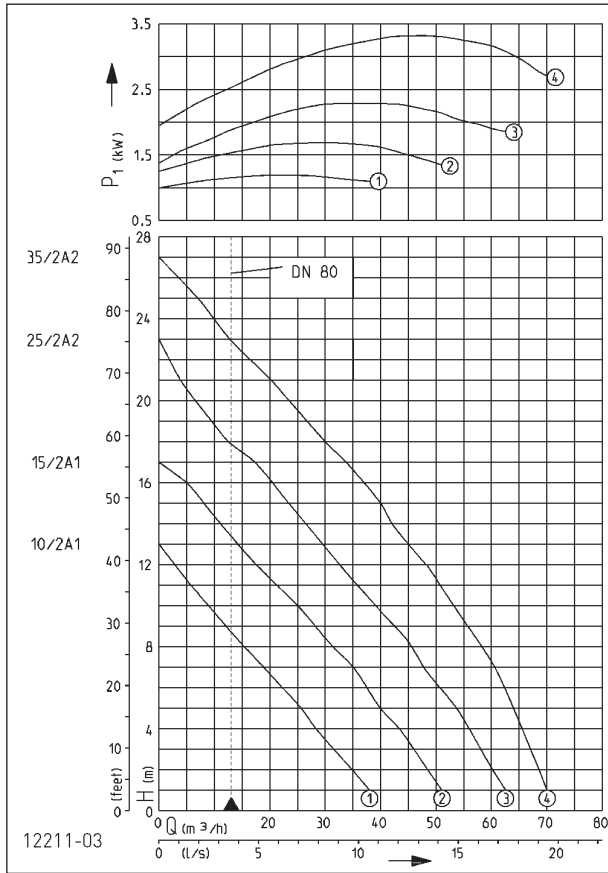

Type	Code	Stocked
① 10/2 A1	JP09615	DE
② 15/2 A1	JP09616	AU
③ 25/2 A2	JP09617	AU
④ 35/2 A2	JP09651	AU

Additional requirements, see technical data control units

Type	Delivery head H [m]	1	2	3	4	5	6	7	8	9	10	12	14	16	18	20	22	24
10/2 A1	Flow rate Q [m³/h]	38	35	32	29	26	22	19	15	12	9							
15/2 A1		50	48	46	43	40	37	35	32	28	25	18	11	5				
25/2 A2		62	60	58	56	54	51	48	46	42	39	33	27	20	13	7		
35/2 A2		70	69	67	66	64	63	61	58	56	53	48	43	37	30	24	16	10

Specifications can be changed without notice. Performance subject to ISO 9906 tolerances.


MULTISTREAM DN 65, N = 2900 MIN-1

Type	Voltage	Motor rating P1	Motor rating P2	Current	Wires	Fuse	S3	Free pas- sage	Pressure outlet	Weight
10/2 A1	3/PE~400 V	1.3 kW	1.10 kW	2.7 A	6G1,5	10 A	60 %	40 mm	DN 65	41 kg
15/2 A1	3/PE~400 V	1.8 kW	1.50 kW	3.3 A	6G1,5	10 A	50 %	40 mm	DN 65	42 kg
25/2 A2	3/PE~400 V	2.6 kW	2.10 kW	4.4 A	6G1,5	10 A	40 %	40 mm	DN 65	48 kg
35/2 A2	3/PE~400 V	3.7 kW	3.04 kW	6.6 A	6G1,5	10 A	40 %	40 mm	DN 65	52 kg

MULTISTREAM

SINGLE-CHANNEL SEWAGE PUMP

PERFORMANCE

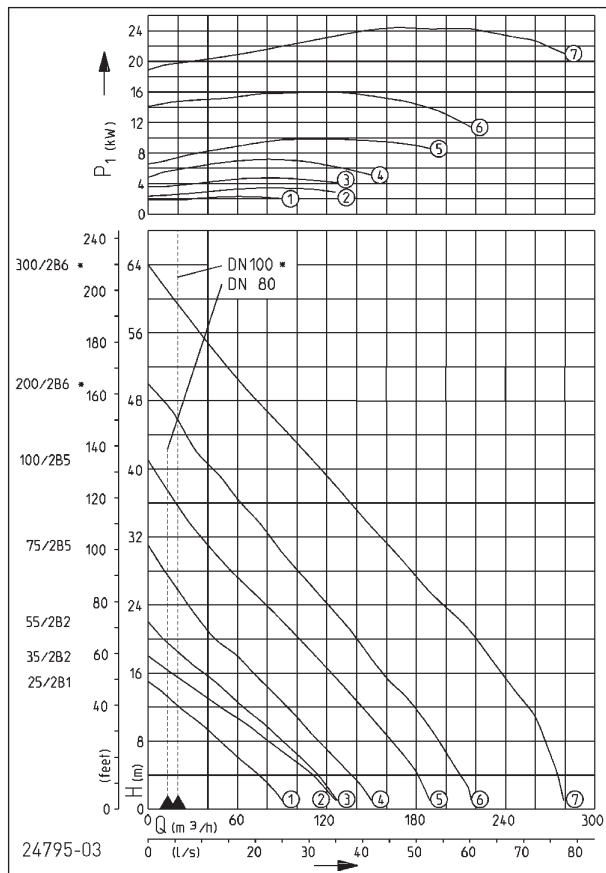

Type	Code	Stocked
① 25/2 B1	JP09618	AU
② 35/2 B2	JP09652	AU
③ 55/2 B2	JP09663	AU
④ 75/2 B5	JP00485	DE
⑤ 100/2 B5	JP09740	DE
⑥ 200/2 B6	JP00492	DE
⑦ 300/2 B6	JP00471	DE

Additional requirements, see technical data control units

Type	Delivery head H [m]	1	3	6	9	12	15	18	21	24	27	30	33	36	40	43	46	50	53	56	60
25/2 B1	Flow rate Q [m³/h]	91	80	62	43	21															
35/2 B2		126	117	97	73	49	23														
55/2 B2		127	118	103	85	65	44	24	6												
75/2 B5		150	142	126	110	93	77	59	42	27	15										
100/2 B5		190	184	173	159	144	129	113	97	78	63	46	32	18							
200/2 B6		217	215	204	191	177	162	149	136	120	104	91	77	62	43	28	19				
300/2 B6		280	277	270	263	254	242	229	216	199	183	167	152	136	113	100	84	63	49	34	17

Specifications can be changed without notice. Performance subject to ISO 9906 tolerances.


MULTISTREAM DN 80 / 100, N = 2900 MIN-1

Type	Voltage	Motor rating P1	Motor rating P2	Current	Wires	Fuse	S3	Free passage	Pressure outlet	Weight
25/2 B1	3/PE~400 V	2.6 kW	2.10 kW	4.4 A	6G1,5	10 A	40 %	70 mm	DN 80	45 kg
35/2 B2	3/PE~400 V	3.7 kW	3.04 kW	6.6 A	6G1,5	10 A	40 %	70 mm	DN 80	55 kg
55/2 B2	3/PE~400/690 V	5.2 kW	4.45 kW	8.7 A/5.0 A	10G2,5	16 A	40 %	70 mm	DN 80	88 kg
75/2 B5	3/PE~400/690 V	7.7 kW	6.60 kW	13.2 A/7.7 A	10G2,5	20 A	30 %	70 mm	DN 80	98 kg
100/2 B5	3/PE~400/690 V	10.5 kW	9.20 kW	17.6 A/10.2 A	10G2,5	25 A	30 %	70 mm	DN 80	121 kg
200/2 B6	3/PE~400/690 V	17.3 kW	15.40 kW	28.8 A/16.7 A	10G2,5	35 A	45 %	70 mm	DN 100	212 kg
300/2 B6	3/PE~400/690 V	27.0 kW	24.45 kW	43.0 A/24.7 A	7G6+3x1	50 A	35 %	70 mm	DN 100	257 kg

MULTISTREAM

SINGLE-CHANNEL SEWAGE PUMP

PERFORMANCE

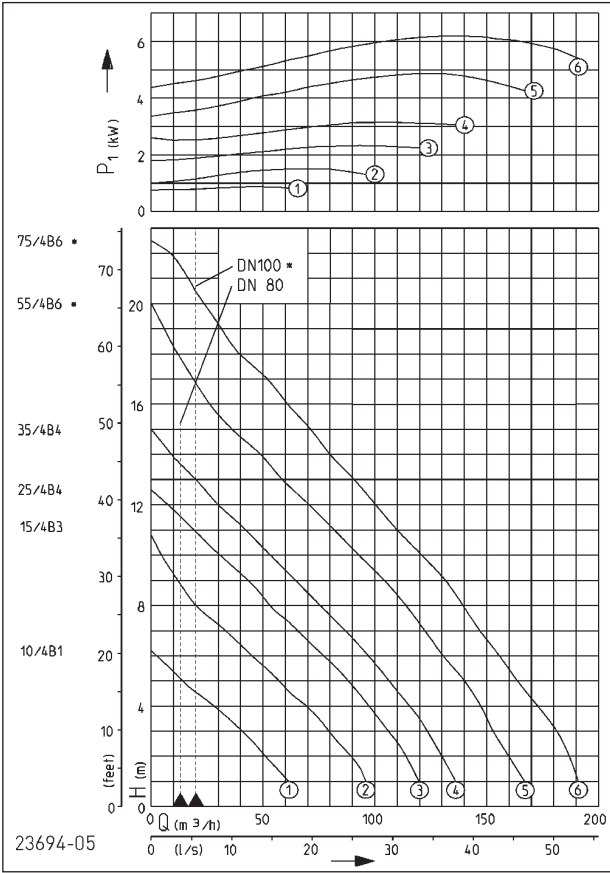

Type	Code	Stocked
① 10/4 B1	JP09620	AU
② 15/4 B3	JP09622	AU
③ 25/4 B4	JP09623	AU
④ 35/4 B4	JP09647	AU
⑤ 55/4 B6	JP00486	DE
⑥ 75/4 B6	JP00489	AU

Additional requirements, see technical data control units

Type	Delivery head H [m]	1	2	3	4	5	6	7	8	9	10	11	12	14	15	16	17	18	20
10/4 B1	Flow rate Q [m³/h]	60	51	40	28	14	3												
15/4 B3		98	89	79	69	57	45	33	20	12	5								
25/4 B4		120	114	106	97	87	77	65	53	43	31	19							
35/4 B4		132	125	119	112	104	95	85	74	64	53	43	30	10					
55/4 B6		167	160	154	147	140	132	123	114	104	93	82	72	49	39	28	19	12	
75/4 B6		191	188	181	173	163	157	149	141	131	122	113	104	82	73	62	52	41	24

Specifications can be changed without notice. Performance subject to ISO 9906 tolerances.


MULTISTREAM DN 80 / 100, N = 1450 MIN-1

Type	Voltage	Motor rating P1	Motor rating P2	Current	Wires	Fuse	S3	Free passage	Pressure outlet	Weight
10/4 B1	3/PE~400 V	0.95 kW	0.73 kW	2.4 A	6G1,5	10 A	50 %	70 mm	DN 80	45 kg
15/4 B3	3/PE~400 V	1.80 kW	1.40 kW	3.4 A	6G1,5	10 A	40 %	70 mm	DN 80	50 kg
25/4 B4	3/PE~400 V	2.70 kW	2.04 kW	4.6 A	6G1,5	10 A	25 %	70 mm	DN 80	59 kg
35/4 B4	3/PE~400 V	3.50 kW	2.65 kW	6.9 A	6G1,5	10 A	25 %	70 mm	DN 80	62 kg
55/4 B6	3/PE~400/690 V	5.80 kW	4.65 kW	10.2 A/5.9 A	10G2,5	16 A	20 %	70 mm	DN 100	111 kg
75/4 B6	3/PE~400/690 V	7.20 kW	5.90 kW	12.8 A/7.4 A	10G2,5	20 A	25 %	70 mm	DN 100	116 kg

MULTISTREAM

SINGLE-CHANNEL SEWAGE PUMP

PERFORMANCE

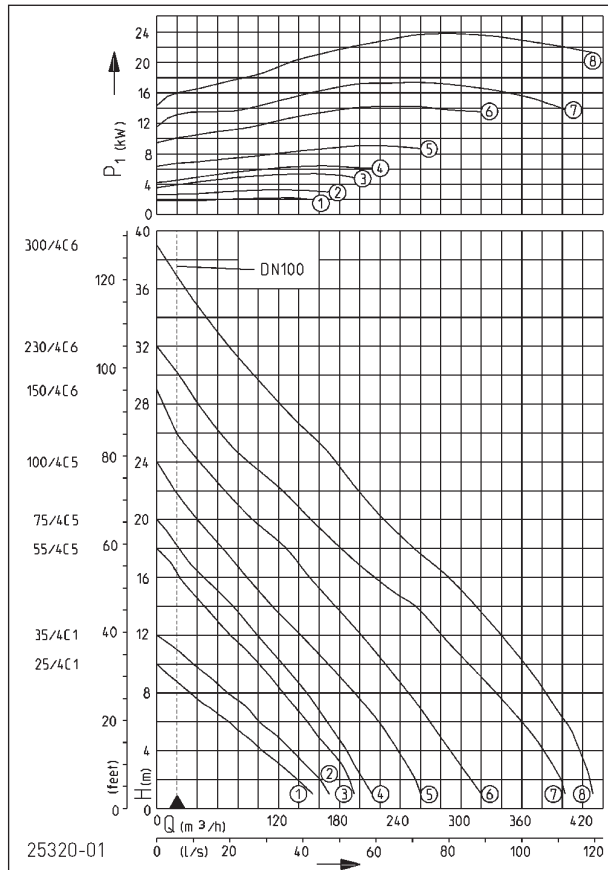

Type	Code	Stocked
① 25/4 C1	JP09624	AU
② 35/4 C1	JP09648	DE
③ 55/4 C5	JP09901	DE
④ 75/4 C5	JP09904	DE
⑤ 100/4 C5	JP09275	DE
⑥ 150/4 C6	JP09882	DE
⑦ 230/4 C6	JP09885	DE
⑧ 300/4 C6	JP09888	DE

Additional requirements, see technical data control units

Type	Delivery head H [m]	1	3	5	7	9	12	14	16	18	20	23	24	26	27	28	29	30	31	34	37	38
25/4 C1	Flow rate Q [m³/h]	154	122	87	51	16																
35/4 C1		170	146	119	89	54																
55/4 C5		198	181	160	136	112	74	45	22													
75/4 C5		212	195	179	160	138	99	74	46	22												
100/4 C5		260	247	228	207	182	142	114	89	65	40	9										
150/4 C6		320	302	280	260	236	202	177	152	126	96	54	43	20	14	8						
230/4 C6		405	390	372	344	320	283	255	218	182	155	110	91	62	51	40	32	22	8			
300/4 C6		430	421	411	393	374	341	315	289	254	225	188	176	151	135	117	107	95	83	47	19	10

Specifications can be changed without notice. Performance subject to ISO 9906 tolerances.


MULTISTREAM DN 100, N = 1450 MIN-1

Type	Voltage	Motor rating P1	Motor rating P2	Current	Wires	Fuse	S3	Free passage	Pressure outlet	Weight
25/4 C1	3/PE~400 V	2.4 kW	1.90 kW	4.2 A	6G1,5	10 A	30 %	100 mm	DN 100	63 kg
35/4 C1	3/PE~400 V	3.5 kW	2.65 kW	6.9 A	6G1,5	10 A	25 %	100 mm	DN 100	67 kg
55/4 C5	3/PE~400/690 V	5.8 kW	4.65 kW	10.2 A/5.9 A	10G2,5	16 A	20 %	100 mm	DN 100	119 kg
75/4 C5	3/PE~400/690 V	7.2 kW	5.90 kW	12.8 A/7.4 A	10G2,5	20 A	25 %	100 mm	DN 100	124 kg
100/4 C5	3/PE~400/690 V	9.5 kW	7.94 kW	17.2 A/10.0 A	10G2,5	25 A	25 %	100 mm	DN 100	138 kg
150/4 C6	3/PE~400/690 V	15.0 kW	13.20 kW	26.7 A/15.5 A	10G2,5	35 A	40 %	100 mm	DN 100	247 kg
230/4 C6	3/PE~400/690 V	19.3 kW	17.00 kW	34.1 A/19.8 A	10G2,5	35 A	35 %	100 mm	DN 100	275 kg
300/4 C6	3/PE~400/690 V	25.5 kW	22.65 kW	45.5 A/26.4 A	7G6+3x1	50 A	25 %	100 mm	DN 100	296 kg

MULTISTREAM

SINGLE-CHANNEL SEWAGE PUMP

PERFORMANCE

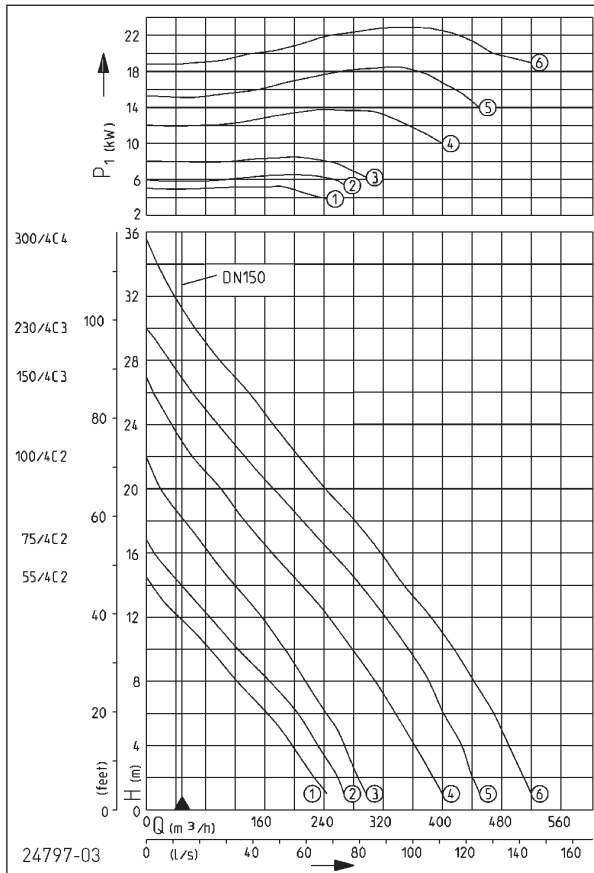

Type	Code	Stocked
① 55/4 C2	JP00487	DE
② 75/4 C2	JP00490	DE
③ 100/4 C2	JP09678	DE
④ 150/4 C3	JP00491	DE
⑤ 230/4 C3	JP00883	DE
⑥ 300/4 C4	JP00493	DE

Additional requirements, see technical data control units

Type	Delivery head H [m]	1	3	5	7	9	11	13	15	17	19	20	21	24	25	27	29	30	31	33	34
55/4 C2	Flow rate Q [m³/h]	245	214	184	144	105	62	22													
75/4 C2		270	245	216	185	146	105	64	26												
100/4 C2		300	278	258	229	202	167	130	96	65	33	18									
150/4 C3		400	373	349	325	295	263	227	192	150	116	100	81	34	21						
230/4 C3		455	434	415	394	369	338	308	272	231	191	172	153	98	80	45	17				
300/4 C4		520	500	478	455	426	399	364	334	298	263	242	223	172	157	118	83	66	51	26	15

Specifications can be changed without notice. Performance subject to ISO 9906 tolerances.


MULTISTREAM DN 150, N = 1450 MIN-1

Type	Voltage	Motor rating P1	Motor rating P2	Current	Wires	Fuse	S3	Free passage	Pressure outlet	Weight
55/4 C2	3/PE~400/690 V	5.8 kW	4.65 kW	10.2 A/5.9 A	10G2,5	16 A	20 %	100 mm	DN 150	125 kg
75/4 C2	3/PE~400/690 V	7.2 kW	5.90 kW	12.8 A/7.4 A	10G2,5	20 A	25 %	100 mm	DN 150	131 kg
100/4 C2	3/PE~400/690 V	9.5 kW	7.94 kW	17.2 A/10.0 A	10G2,5	25 A	25 %	100 mm	DN 150	149 kg
150/4 C3	3/PE~400/690 V	15.0 kW	13.20 kW	26.7 A/15.5 A	10G2,5	35 A	40 %	100 mm	DN 150	268 kg
230/4 C3	3/PE~400/690 V	19.3 kW	17.00 kW	34.1 A/19.8 A	10G2,5	35 A	35 %	100 mm	DN 150	288 kg
300/4 C4	3/PE~400/690 V	25.5 kW	22.65 kW	45.5 A/26.4 A	7G6+3x1	50 A	25 %	100 mm	DN 150	308 kg

MULTISTREAM

SINGLE-CHANNEL SEWAGE PUMP

PERFORMANCE

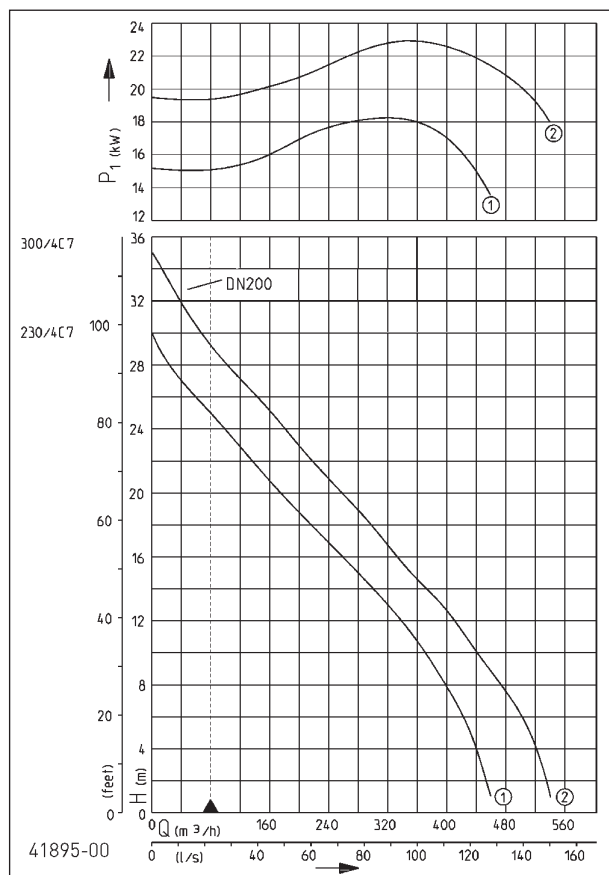

Type	Code	Stocked
① 230/4 C7	JP09392	DE
② 300/4 C7	JP09394	DE

Additional requirements, see technical data control units

Type	Delivery head H [m]	1	3	5	7	9	11	13	15	17	19	20	21	24	25	27	29	30	31	33	34
230/4 C7	Flow rate Q [m³/h]	460	443	429	409	387	358	322	282	240	196	177	158	97	78	42	11				
300/4 C7		540	524	509	483	453	427	396	355	318	280	258	238	180	165	126	87	71	54	26	15

Specifications can be changed without notice. Performance subject to ISO 9906 tolerances.


MULTISTREAM DN 200, N = 1450 MIN-1

Type	Voltage	Motor rating P1	Motor rating P2	Current	Wires	Fuse	S3	Free passage	Pressure outlet	Weight
230/4 C7	3/PE~400/690 V	19.3 kW	17.00 kW	34.1 A/19.8 A	10G2,5	35 A	35 %	100 mm	DN 200	295 kg
300/4 C7	3/PE~400/690 V	25.5 kW	22.65 kW	45.5 A/26.4 A	7G6+3x1	50 A	25 %	100 mm	DN 200	315 kg

MULTISTREAM

SINGLE-CHANNEL SEWAGE PUMP

Dimensions guide rail system

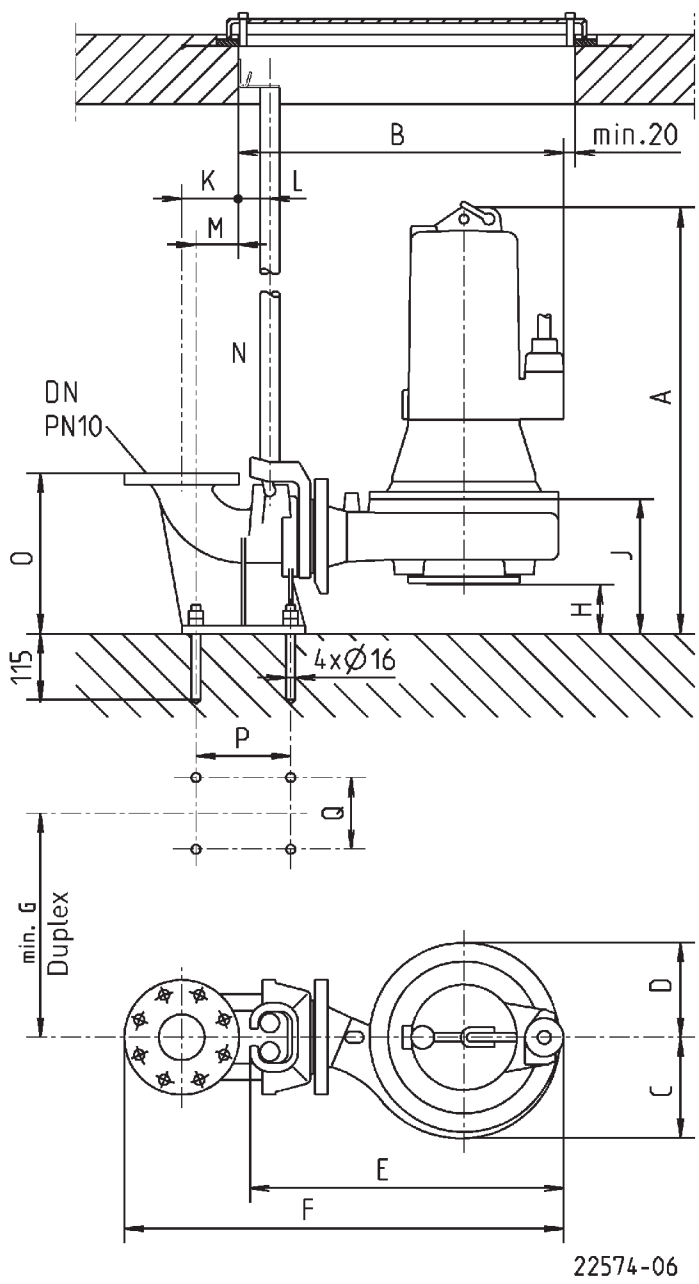

MULTISTREAM


SINGLE-CHANNEL SEWAGE PUMP

	GR	DN	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	Q
10/2 A1	65	80	510	460	110	105	435	660	390	108	213	100	55	74	1"	280	165	125
15/2 A1	65	80	510	460	110	105	435	660	390	108	213	100	55	74	1"	280	165	125
25/2 A2	65	80	510	480	130	125	455	680	390	108	220	100	55	74	1"	280	165	125
35/2 A2	65	80	545	480	130	125	455	680	390	108	220	100	55	74	1"	280	165	125
25/2 B1	80	80	520	475	130	110	455	675	390	95	225	100	55	74	1"	280	165	125
35/2 B2	80	80	555	495	145	125	475	695	390	92	225	100	55	74	1"	280	165	125
55/2 B2	80	80	680	525	145	125	510	725	390	92	225	100	55	74	1"	280	165	125
75/2 B5	80	80	685	565	180	165	550	765	390	85	235	100	55	74	1"	280	165	125
100/2 B5	80	80	745	565	180	165	550	765	390	85	235	100	55	74	1"	280	165	125
200/2 B6	101	100	910	680	235	190	660	900	480	155	315	110	55	82	1"	345	175	385
300/2 B6	101	100	1000	680	235	190	660	900	480	155	315	110	55	82	1"	345	175	385
10/4 B1	80	80	520	475	130	110	455	675	390	95	225	100	55	74	1"	280	165	125
15/4 B3	80	80	520	490	145	125	470	690	390	95	225	100	55	74	1"	280	165	125
25/4 B4	80	80	520	570	190	160	545	770	390	85	225	100	55	74	1"	280	165	125
35/4 B4	80	80	555	570	190	160	545	770	390	85	225	100	55	74	1"	280	165	125
55/4 B6	101	100	765	670	235	190	650	890	480	155	315	110	55	82	1"	345	175	385
75/4 B6	101	100	765	670	235	190	650	890	480	155	315	110	55	82	1"	345	175	385
25/4 C1	100	100	565	570	185	160	550	790	390	95	270	110	55	82	1"	310	175	150
35/4 C1	100	100	600	570	185	160	550	790	390	95	270	110	55	82	1"	310	175	150
55/4 C5	101	100	765	645	230	180	625	865	480	125	315	110	55	82	1"	345	175	385
75/4 C5	101	100	765	645	230	180	625	865	480	15	315	110	55	82	1"	345	175	385
100/4 C5	101	100	825	645	230	180	625	865	480	125	315	110	55	82	1"	345	175	385
150/4 C6	101	100	910	755	290	250	735	975	580	105	315	110	55	82	1"	345	175	385
230/4 C6	101	100	1000	755	290	250	735	975	580	105	315	110	55	82	1"	345	175	385
300/4 C6	101	100	1000	755	290	250	735	975	580	105	315	110	55	82	1"	345	175	385
55/4 C2	151S	150	790	770	260	200	740	1055	480	150	340	145	80	122	1.5"	435	260	385
75/4 C2	151S	150	790	770	260	200	740	1055	480	150	340	145	80	122	1.5"	435	260	385
100/4 C2	151S	150	850	770	260	200	740	1055	480	150	340	145	80	122	1.5"	435	260	385
150/4 C3	151	150	935	885	325	260	855	1175	630	130	340	145	80	122	1.5"	435	260	385
230/4 C3	151	150	1025	885	325	260	855	1175	630	130	340	145	80	122	1.5"	435	260	385
300/4 C4	151	150	1025	885	325	260	855	1175	630	130	340	145	80	122	1.5"	435	260	385
230/4 C7	200S	200	1070	935	325	260	905	1305	630	175	385	200	80	193	1.5"	535	350	400
300/4 C7	200S	200	1070	935	325	260	905	1305	630	175	385	200	80	193	1.5"	535	350	400

MULTISTREAM


SINGLE-CHANNEL SEWAGE PUMP

Dimensions pump base

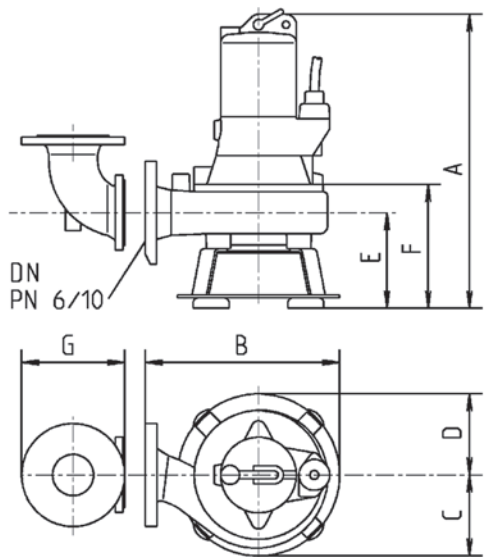

22575-05

Discharge outlet

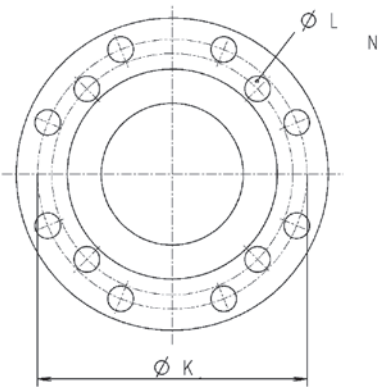

29044

MULTISTREAM


SINGLE-CHANNEL SEWAGE PUMP

	DN	A	B	C	D	E	F	G	K	L	N
10/2 A1	65	475	325	110	105	135	175	175	130/145	14/18	4
15/2 A1	65	475	325	110	105	135	175	175	130/145	14/18	4
25/2 A2	65	475	345	135	135	135	185	175	130/145	14/18	4
35/2 A2	65	510	345	135	135	135	185	175	130/145	14/18	4
25/2 B1	80	530	340	135	135	185	240	200	150/160	18	4
35/2 B2	80	570	380	145	135	185	240	200	150/160	18	4/8
55/2 B2	80	700	395	145	135	185	240	200	150/160	18	4/8
75/2 B5	80	725	460	195	195	215	280	200	150/160	18	4/8
100/2 B5	80	785	460	195	195	215	280	200	150/160	18	4/8
200/2 B6	100	885	535	235	195	210	290	230	170/180	18	4/8
300/2 B6	100	975	535	235	195	210	290	230	170/180	18	4/8
10/4 B1	80	530	340	135	135	185	240	200	150/160	18	4/8
15/4 B3	80	535	380	160	160	185	240	200	150/160	18	4/8
25/4 B4	80	535	440	190	160	185	240	200	150/160	18	4/8
35/4 B4	80	570	440	190	160	185	240	200	150/160	18	4/8
55/4 B6	100	740	520	235	195	210	290	230	170/180	18	4/8
75/4 B6	100	740	520	235	195	210	290	230	170/180	18	4/8
25/4 C1	100	600	450	195	195	235	305	230	170/180	18	4/8
35/4 C1	100	635	450	195	195	235	305	230	170/180	18	4/8
55/4 C5	100	775	480	230	195	240	320	230	170/180	18	4/8
75/4 C5	100	775	480	230	195	240	320	230	170/180	18	4/8
100/4 C5	100	835	480	230	195	240	320	230	170/180	18	4/8
150/4 C6	100	925	610	290	250	250	330	230	170/180	18	4/8
230/4 C6	100	1015	610	290	250	250	330	230	170/180	18	4/8
300/4 C6	100	1015	610	290	250	250	330	230	170/180	18	4/8
55/4 C2	150	770	580	260	215	240	320	320	225/240	18/22	8
75/4 C2	150	770	580	260	215	240	320	320	225/240	18/22	8
100/4 C2	150	830	580	260	215	240	320	320	225/240	18/22	8
150/4 C3	150	925	695	325	260	250	330	320	225/240	18/22	8
230/4 C3	150	1015	695	325	260	250	330	320	225/240	18/22	8
300/4 C4	150	1015	695	325	260	250	330	320	225/240	18/22	8
230/4 C7	200	1015	725	325	260	250	330	0	295	22	8
300/4 C7	200	1015	725	325	260	250	330	0	295	22	8

MULTISTREAM

SINGLE-CHANNEL SEWAGE PUMP

Example of installation guide rail system

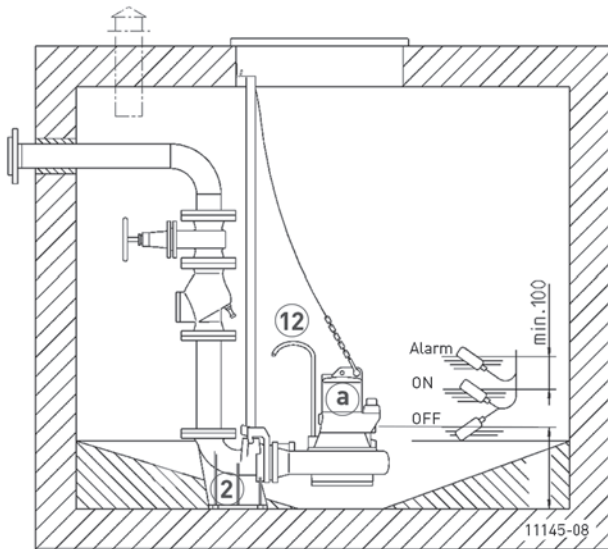

Types of operation: Up to 40°C medium temperature
 Motor submerged: continuous operation S1
 Motor not submerged intermittent operation S3
 (e.g. 20% = 2 min operation and 8 min pause)

MECHANICAL ACCESSORY

				Code No.
	② Guide rail system	GR 65	DN 80, 170x226x280 (AxBxH)	JP00494
		GR 80	DN 80, 170x229x280 (AxBxH)	JP00495
		GR 100	DN 100, 200x254x310 (AxBxH)	JP00496
		GR 101	DN 100, 235x254x345 (AxBxH)	JP21037
		GR 151	DN 150, 260x332x435 (AxBxH)	JP00693
		GR 200S	DN 200, 305x410x535 (AxBxH)	JP42275
		DN 80/100/80	355x480(HxB), PN 10	JP00202
		DN 100/100/100	355x480(HxB), PN 10	JP00203
	⑩ Pump base	A 170, for A1	76x245 (HxB)	JP00681
		A 220, for A2, AW1, AW2	90x295 (HxB)	JP00682
		B 170, for B1	115x280 (HxB)	JP00683
		B 220, for B2,B3,B4,BW1	115x315 (HxB)	JP00684
		C 275, for B5,B6,C1,C5,BW2,CW3	145x385 (HxB)	JP00685
		C 325, for C2,CW2	145x565 (HxB)	JP00701
		C 410, for C3,C4,C6,C7	145x650 (HxB)	JP00702
	⑪ Flanged connection	A 80 (similar Q-piece 90°), DN 80 PN10/DN 65 PN6	130x75 (HxB)	JP00577
		B 80 (similar Q-piece 90°), DN 80 PN10/PN6	150x100 (HxB)	JP00578
		C 100 (similar Q-piece 90°), DN 100 PN10/PN6	175x120 (HxB)	JP00579

MECHANICAL ACCESSORY

			Code No.
	⑫ Flushing tube	Type I	10/... - 45/...
		Type II	55/... - 100/...
		Type III	150/... - 300/...

MULTISTREAM

SINGLE-CHANNEL SEWAGE PUMP

PUMP CONTROLLER

Type	Code no.	Single pump controller	Dual pump controller	Float switch 10 m	Float switch 15 m	Float switch 20m	Float switch 30 m	Float switch 40 m
Without level control								
15/2 A1	JP09616	PPC-15006-A	PPC-30030-A					
25/2 A2	JP09617	PPC-15006-B	PPC-30030-B					
35/2 A2	JP09651	PPC-15006-C	PPC-30030-C					
25/2 B1	JP09618	PPC-15006-B	PPC-30030-B					
35/2 B2	JP09652	PPC-15006-C	PPC-30030-C					
55/2 B2	JP09663	PPC-15006-C	PPC-30030-C					
10/4 B1	JP09620	PPC-15006-A	PPC-30030-A	FSW-10M	FSW-15M	FSW-20M	FSW-30M	FSW-40M
15/4 B3	JP09622	PPC-15006-A	PPC-30030-A					
25/4 B4	JP09623	PPC-15006-B	PPC-30030-B					
35/4 B4	JP09647	PPC-15006-C	PPC-30030-C					
75/4 B6	JP00489	PPC-15006-D	PPC-30030-D					
25/4 C1	JP09624	PPC-15006-B	PPC-30030-B					